


Column Base $\pm 1\%$ elevation
in relation to the Base Elevation

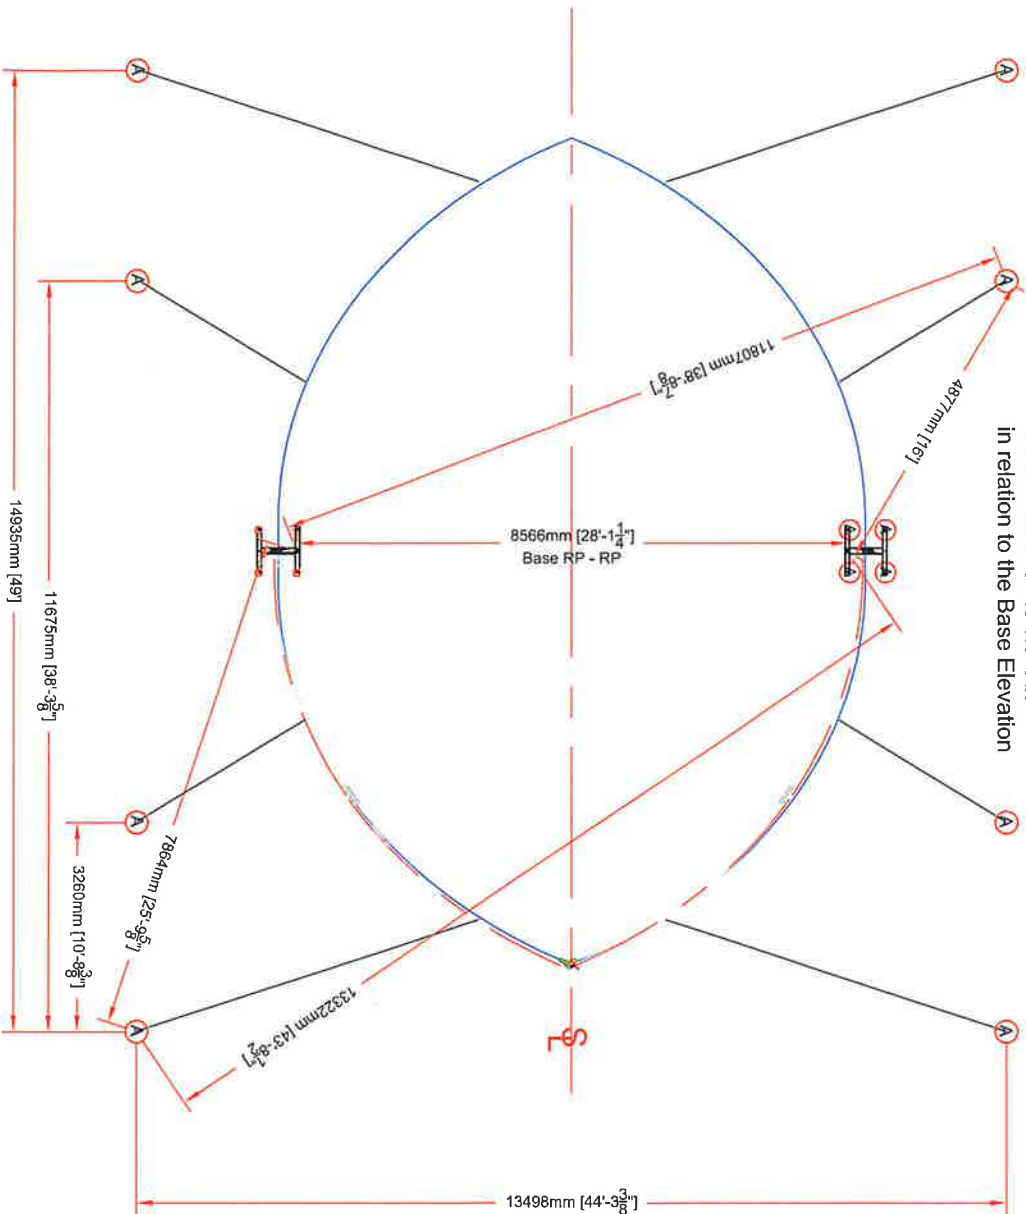

- Legend**
- A** = 42" x 1-1/8" Hogan Double Head Stake
 - B** = 30" 1-1/8" Hogan Double Head Stake

Minimum clearance height required for installation = 8500mm = 28'

Rev. #	Date	By	Description
2	13 Sept 11	RB	Update guy location & move values outlined by 2.75 for design change
3	14 OCT 11	RB	Update to field locations
4	18 OCT 11	KM	move shorter guy/line, webbing length needs to be longer






tentnology co.

15427 66th Avenue Surrey B.C. Canada V3S 2A1

Tel: (604) 597-8368 Fax: (604) 597-8749 e-mail: tent@tentnology.com

Project: S1000 SL 110D	Date: 9 Sept 11	Scale: NTS	Sheet No: 1 of 1
Drawn By: RB	App'd: <i>[Signature]</i>		
CD: d By: ALI			

50.32.405 SURVEY

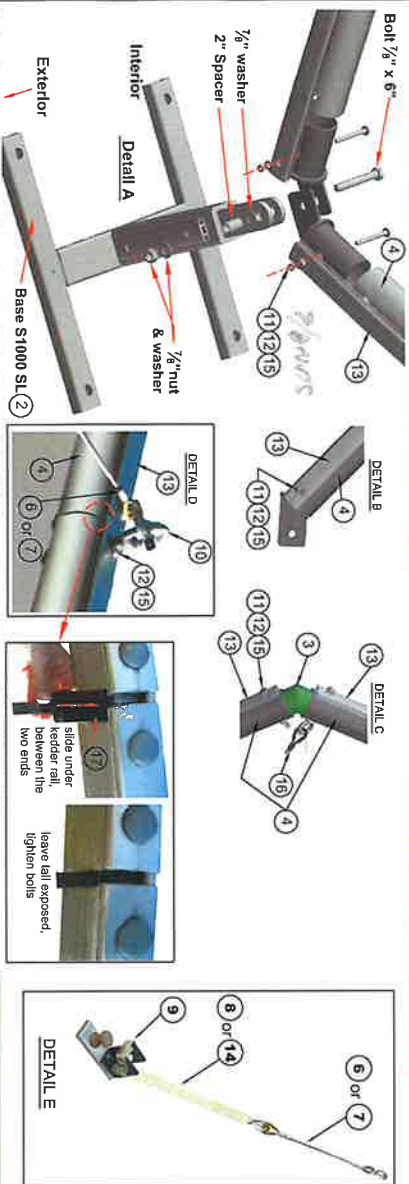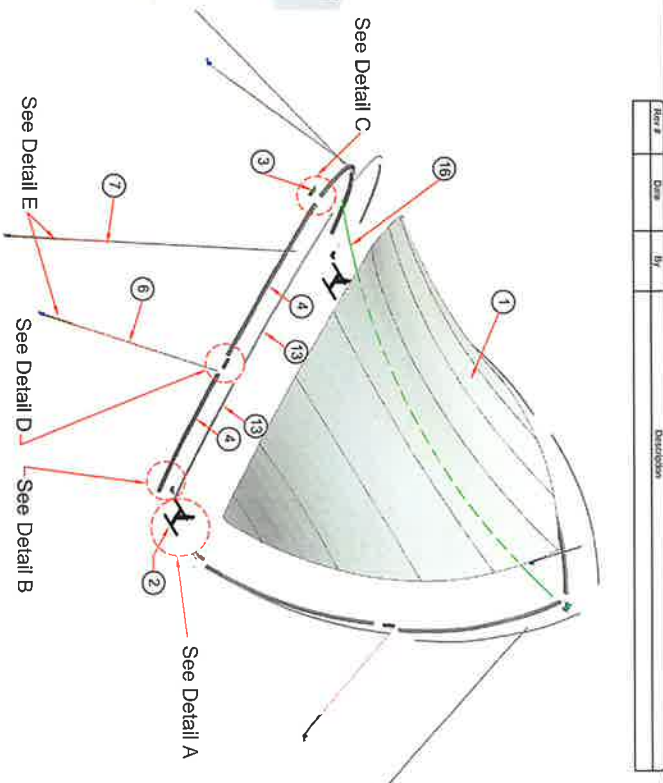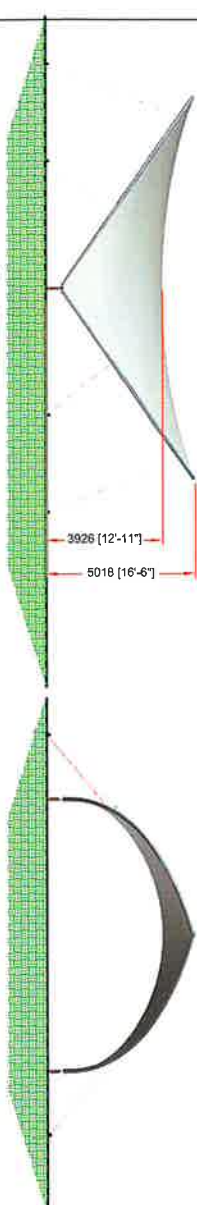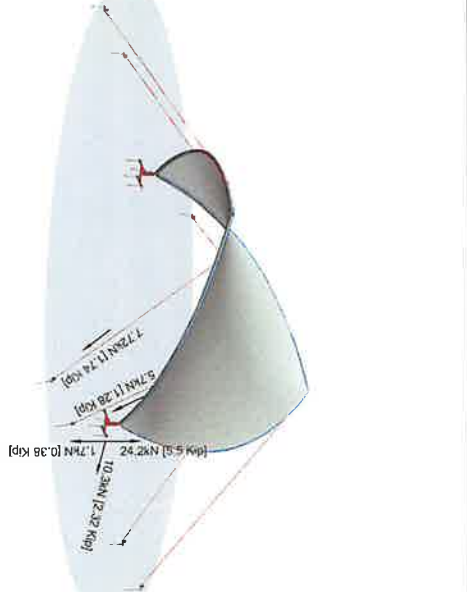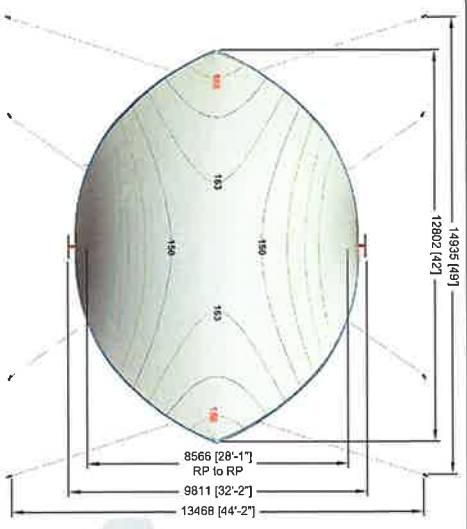

Designed to meet or exceed the following requirements: Design Wind - IBC-2003 115 MPH basic wind speed (Temporary), NBC 4.1.7 TUV DIN 4112 wind pressure 0.5 KPa; Fire - UL C S109, Calif. Fire Marshall, & M2. User Note: Tent integrity is a direct function of installation quality. Follow installation instructions, adding stakes as appropriate for soil & site conditions. When in doubt, consult local engineer. Minimum clearance height required for installation = 8500mm = 28 ft.

WARNING ON TENT CAN RESULT IN INJURY OR DEATH!

Parting Oct 19 2011 4:50

tentnology co.
15427 66th Avenue Surrey B.C., Canada V3S 2A1
Tel: (604) 597-8368 Fax: (604) 597-8749 e-mail: tent@tentnology.com

SADDLE SPAN S1000 SL Open
Engineering General Arrangement
Project: S1000 SL Date: 12 Oct 2011 Scale: NTS Sheet No: 1 of 1
Des By: KMI
Ck'd By: ALI
App'd: JJP

Appropriate anchor kit required to complete the installation of this system

ITEM #	PART #	QTY.	LM	DESCRIPTION	WTL LB
1	40.32.043	1	1	TOP S1000 SL	175
2	30.59.526	2	1	BASE S1000 SL ASSEMBLY	135
3	30.59.501	2	1	APEX S1000	223
4	30.59.509	8	1	CHORD S1000 SL	462
5	30.59.512	4	1	SLEEVE CHORD S1000 SL	40
6	30.16.099	4	1	GUYS CABLE ASSY SADDLE SPAN W/ GROUND	0.56
7	30.16.181	4	1	GUYS CABLE ASSY SADDLE SPAN W/ ELEV	8.3
8	30.16.228	4	1	STRAP 2 IN X 30 IN W/ WITH SHACKLE	5.7
9	30.73.020	4	1	ANCHOR W/ W/ WITH SHACKLE	48
10	20.23.035	8	1	NUT EYE 0.625 CROSBY G80 # 5 - 3/4 THREAD	8.0
11	20.23.035	24	1	NUT EYE 0.75 CROSBY G80 # 5 - 3/4 THREAD	2.54
12	20.23.046	32	1	BOLT HEX HD 0.75 X 6.5 IN C PL GRS	19.7
13	30.59.515	8	1	KEEDER RAIL 13MM 161.25IN R40 S1000	107
14	30.46.029	4	1	STRAP 2 IN X 30 IN W/ WITH SHACKLE	12.5
15	20.00.240	32	1	WASHER FLAT STEEL 7/8 GALV BS USS HD	3.38
16	30.16.193	1	1	CABLE S1000 SAFETY GREEN	2.00
17	30.59.510	4	1	GAUSET KEEDER S1000 SL	0.50
18	70.03.110	1	1	SADDLE SPAN S1000 SL OPEN	1.117
TOTAL					50.32.405