


WMS

**INTERNATIONAL®**

January 09, 2006

Prepared For:  
NAPERVILLE FIRE DEPARTMENT  
CHIEF MIKE ZYWANSKI  
1380 Aurora Road  
Naperville, IL 60563-  
(630)305 - 5901

Presented By:  
CHICAGO INTL TRK-MELROSE  
Dave R Mueller  
2090 N. MANNHEIM ROAD  
MELROSE PARK IL 60160  
708-865-1700

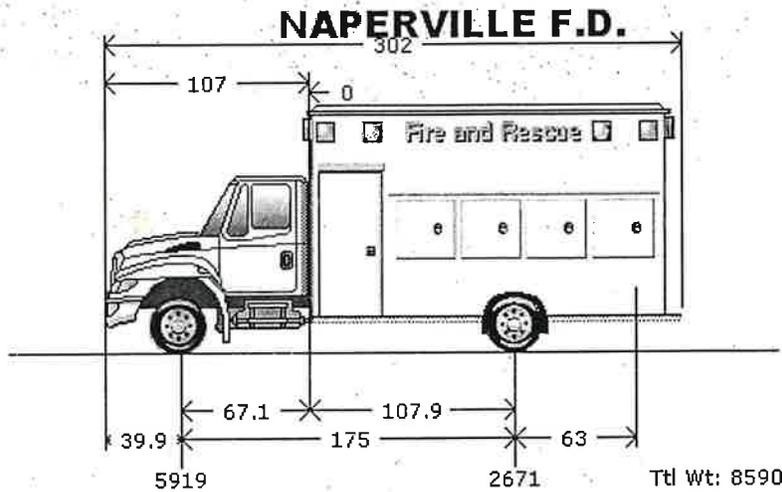

**Model Profile**  
**2006 4300 SBA LP 4X2 (MH025)**

- MISSION:** Requested GVWR: 20000. Calc. GVWR: 20000  
Calc. Geared Speed: N/A
- DIMENSION:** Wheelbase: 175.0, CA: 107.9, Axle to Frame: 63.0
- ENGINE, DIESEL:** {International DT466} 50 State, 210 HP, 520 lb-ft Torque @ 1400 RPM, 2600 RPM Governed Speed, # 2 Bell Housing
- TRANSMISSION, AUTOMATIC:** {ALLISON 2200\_EVS\_P} 4th Generation Controls; Close Ratio, 5-Speed, With Overdrive; Includes Park Pawl, With PTO Provision, Less Retarder, With 26,000-lb GVW & GCW Max. Omit Item (Clutch & Control)
- CLUTCH:** {Dana Spicer D800-F} I-Beam Type, 8,000-lb Capacity
- AXLE, FRONT NON-DRIVING:** {International S150-S} Single Reduction, 15,500-lb Capacity With 170 Wheel Ends Gear Ratio: 5.13
- AXLE, REAR, SINGLE:**
- CAB:** Conventional, Steel
- TIRE, FRONT:** (2) 245/70R19.5 G647 RSS (GOODYEAR) 626 rev/mile, load range F, 12 ply
- TIRE, REAR:** (4) 245/70R19.5 G647 RSS (GOODYEAR) 626 rev/mile, load range F, 12 ply
- SUSPENSION, REAR, AIR, SINGLE:** {International} Ride Optimized Suspension (IROS); 12,000-lb Capacity, 5.3" Ride Height, With Shock Absorbers
- PAINT:** Cab Schematic 100GA  
Location 1: 9036, Cool Gray Light  
Chassis Schematic N/A