


### SPECIFICATIONS

<b>Focal Length</b>	10 - 210 mm	<b>Flange Back</b>	17.526 mm
<b>Maximum Relative Aperture</b>	1:1.5	<b>Operation</b>	<b>Zoom</b> Motorized (DC 6 ~ 12V, Max 60mA) Speed Approx. <b>12sec.</b>
<b>Iris</b>	F1.5 - 1000	<b>Focus</b>	Motorized (DC 6 ~ 12V, Max 60mA) Speed Approx. <b>13sec.</b>
<b>Zoom Ratio</b>	21 X	<b>Iris</b>	Motorized (DC 6 ~ 12V, Max 60mA) Speed Approx. <b>3sec.</b>
<b>Angular Field of View</b>	35.6° x 26.8° at 10 mm 1.78° x 1.35° at 210 mm	<b>Operation Temperature</b>	- 10 °C ~ 50 °C / 14 °F ~ 122 °F
<b>Image Format</b>	6.4 x 4.8 mm (Ø8 mm)	<b>Mount</b>	C-Mount (Adjustable Lens Position)
<b>Minimum Object Distance</b>	2.0 m ( From Front Vertex )	<b>Size, Weight</b>	93.5(W) x 82(H) x 169(D) mm, Approx. 1.1kg
<b>Optical Back Focal Distance</b>	13.91 mm (In Air)		

### DIMENSIONS

UNIT: mm

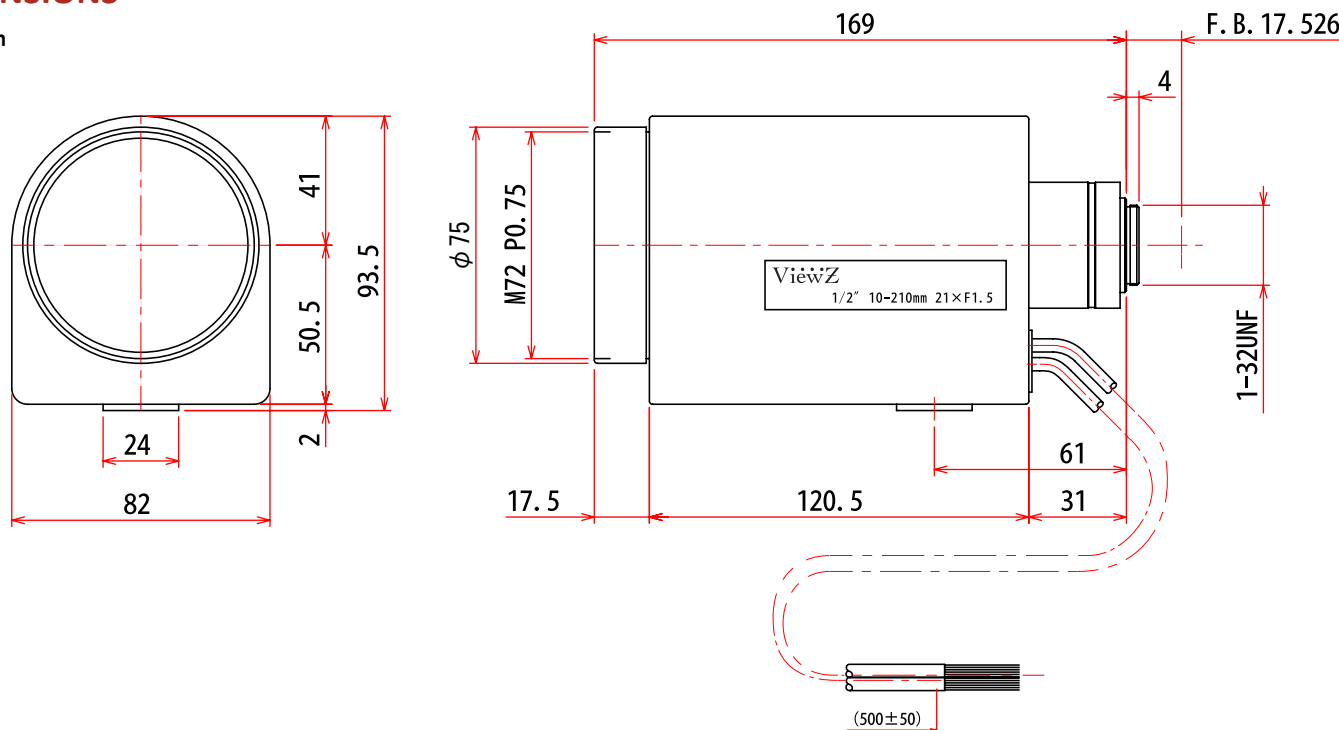

### CIRCUIT DIAGRAM

