

## 2/3" 3.6MP Motorized Zoom with 3-Motor 11-66mm F-1.8 C-Mount

Compatible with 2/3", 1/2", 1/3" Cameras


## SPECIFICATIONS

<b>Focal Length</b>	11 - 66mm
<b>Maximum Relative Aperture</b>	1:1.8 ( Tele End 1:1.8 )
<b>Iris</b>	F1.8 - Close
<b>Zoom Ratio</b>	6 X
<b>Angular Field of View</b>	43.3° x 33.0° at 11 mm 7.7° x 5.8° at 66 mm
<b>Image Format</b>	8.8 x 6.6mm (Ø11 mm)
<b>Minimum Object Distance</b>	1.4 m (From Front Vertex)
<b>Object Dimensions at M.O.D.</b>	111 x 829 mm at 11 mm 188 x 142 mm at 66 mm
<b>Optical Back Focal Distance</b>	15.28 mm (In Air)

<b>Flange Back</b>		17.526 mm
<b>Operation</b>	<b>Focus</b>	Motorized ( DC ± 6.4V, Max. 40 mA )
	<b>Zoom</b>	Motorized ( DC ± 6.4V, Max. 40 mA )
	<b>Iris</b>	Motorized ( DC ± 6.4V, Max. 40 mA )
<b>Operation Temperature</b>		- 10 °C ~ 50 °C / 14 °F ~ 122 °F
<b>Mount</b>		C-Mount (Adjustable Lens Position)
<b>Front Thread</b>		72.5mm P0.75
<b>Size, Weight</b>		Ø76 x 84.5(W) x 85(H) x 120(D) mm, Approx. 700g

## DIMENSIONS

UNIT: mm

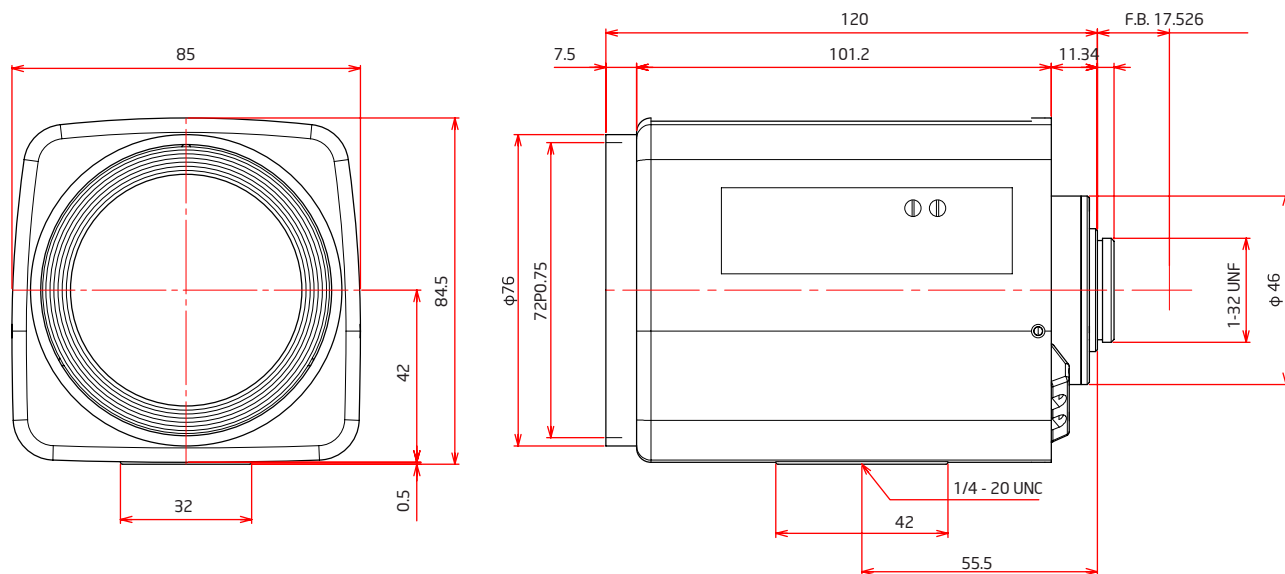

## CIRCUIT DIAGRAM

