

# ECHO BARRIER<sup>®</sup>

Environmentally Sound

## H9<sup>™</sup> Acoustic Barrier

### Specifications



World-leading noise control

# ECHO BARRIER<sup>®</sup>


Environmentally Sound

## H9<sup>™</sup> Acoustic Barrier


The Echo Barrier H9<sup>™</sup> offers outstanding all-round performance, complementing exceptional noise absorption and reduction with portability, durability, and versatility. Impressively resistant to water and to extremes of temperature, the Echo Barrier H9<sup>™</sup> rises to a multitude of challenges, such as those posed by humid environments and highly stringent fire regulations. ASTM E84 tests for flame spread and smoke development indicate its suitability for projects subject to highly stringent fire regulations.



NOISE REDUCTION

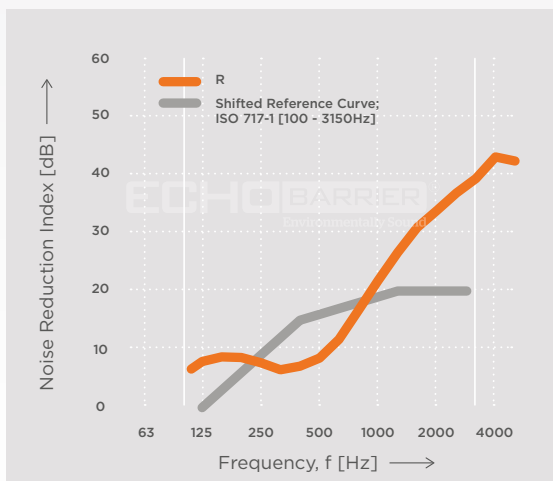

NOISE ABSORPTION

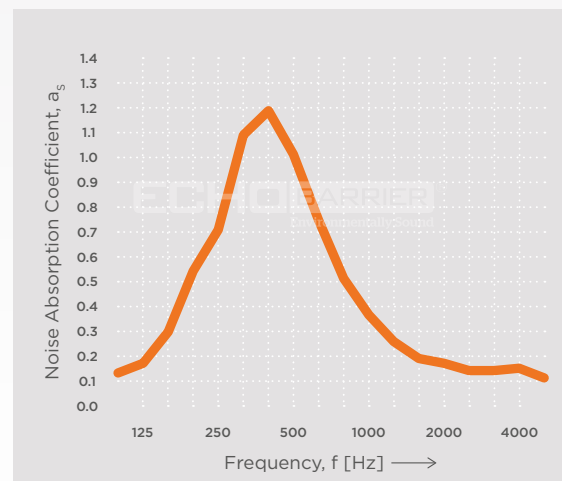


## H9™ Acoustic Barrier specifications

|                                        |                                                         |
|----------------------------------------|---------------------------------------------------------|
| Max Noise Reduction (Lab Tested)*      | 43 dB                                                   |
| Max Noise Absorption (Lab Tested)*     | 100 %                                                   |
| Height                                 | 6 ft 9 in (2050 mm)                                     |
| Width                                  | 4 ft 5 in (1335 mm)                                     |
| Rolled dimensions                      | 1 ft 4 in (400 mm) diameter, 4 ft 5 in (1335 mm) wide   |
| Weight                                 | 12 lb (5.5 kg)                                          |
| Fire resistant test standard*          | BS 7837-1996, ASTM E84                                  |
| Water resistant test standard*         | BSEN 60529:1992 IPX6 / IPX9                             |
| Dust resistant test standard*          | BSEN 60529-1992                                         |
| Cold resistant test standard (result)* | BSEN 60068/2/1:2007 (-40 °C/F)                          |
| Tensile test standard (result)*        | ISO 17025 (5.85 kN vertical, 1.1 kN horizontal)         |
| UV resistant                           | 3 years (USA + Canada), 5 years (rest of the world)     |
| Safety features                        | Two nighttime reflective strips, hazard icons           |
| Quick install                          | 1 person in 30 seconds with installation kits, rollable |
| Installation kits                      | Yes                                                     |
| Anti-theft                             | Security cable, Data tag                                |
| Cleaning                               | Power wash                                              |
| Identification code part number        | Unique RFID number per each unit                        |
| Manufacturer's warranty                | 2 years                                                 |
| Color options                          | On request                                              |

\* Full independent laboratory results can be obtained on request to [info@echobarrier.com](mailto:info@echobarrier.com)

## Effective installation

The lightweight Echo Barriers enable placement versatility along a jobsite's perimeter or directly in front of the noise source for optimum mitigation.

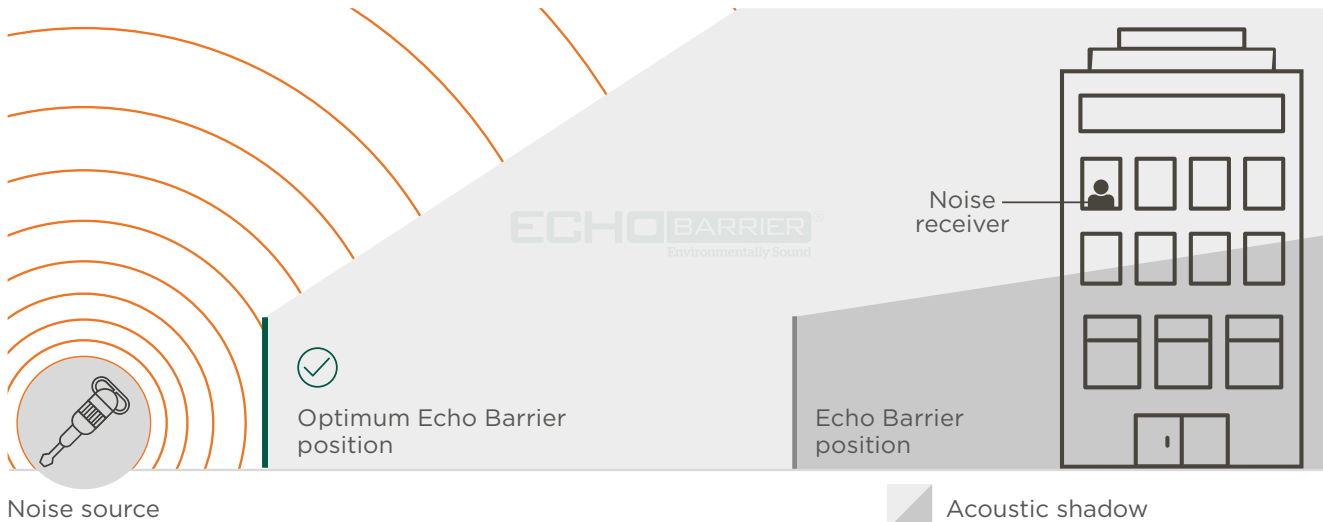

## What makes our acoustic barriers so effective?



### Front outer layer

Extremely durable, high-quality waterproof PVC, of optimum mass to achieve maximum noise mitigation, also offering an impressive visual finish.



### Noise-absorbent composite

The heart of the panel: Echo Barrier's lightweight, but highly noise-absorbent composite.



### Waterproof breathable membrane/mesh

The membrane/mesh lets in sound, so that it can be absorbed by the composite, but keeps water out.

