

## 1. Applicable Area

150(L) × 150(W) ~ 310(L) × 260(W)[mm]

## 2. Ball size

Φ45 ~ Φ300[um]

## 3. Ball Pitch

Min. 90[um]

## 4. Cycle Time

※Detailed conditions are set forth in the specification.

63[sec] / Qp (250mm × 250mm)


## 5. Other specifications

※ Detailed conditions are set forth in the specification .

Printing/Mounting Accuracy : Less than ±10[um]

Repair Accuracy : Less than ±13[um]

Failure Rate : Less than 10[ppm]

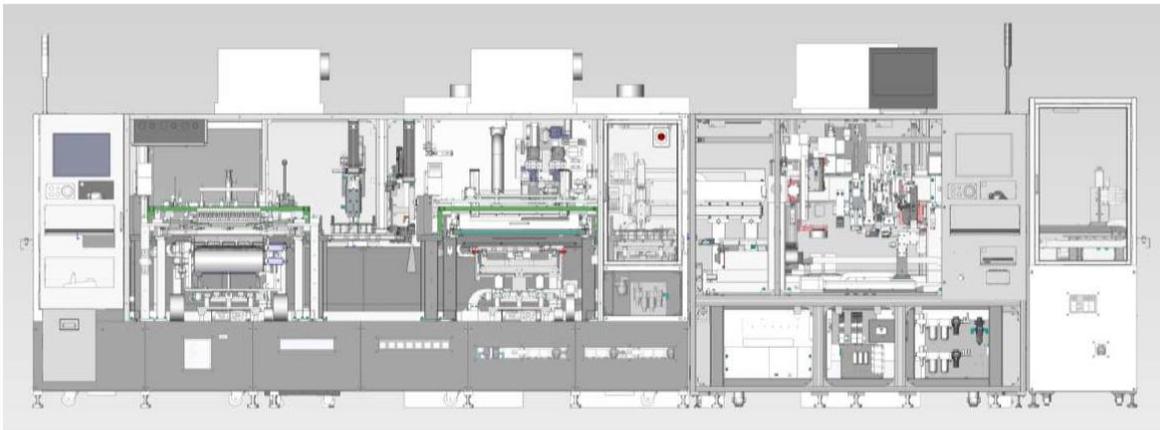

Load


Flux Print

Ball Mount

Inspection & Repair

Unload

# BM-2100S Layout (Top view)

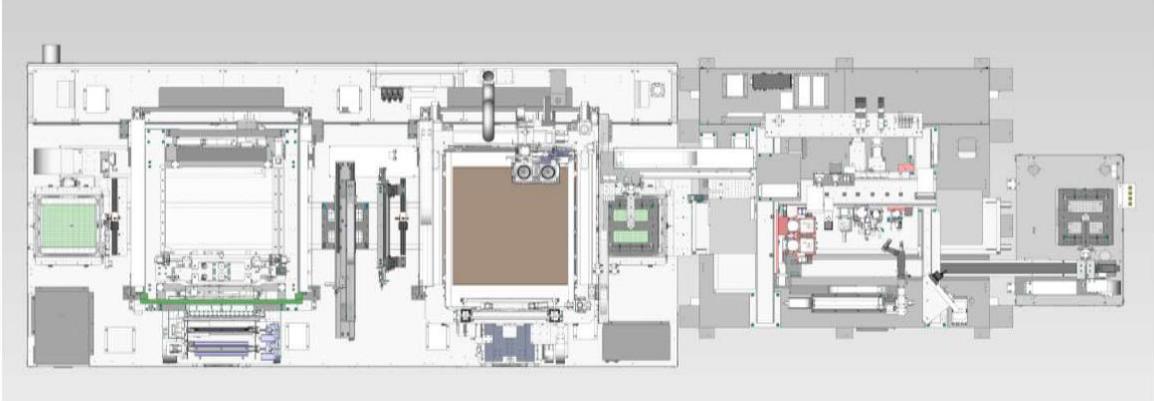

Load

Flux Print

Ball Mount

Inspection & Repair

Unload

LIQUIDITY SEI