

## 1" 4MP Day/Night Motorized Zoom with 3-Motor 24-65mm F-2.0 C-Mount


Compatible with 1", 2/3", 1/2", 1/3" Cameras

### SPECIFICATIONS

<b>Focal Length</b>	24 - 65mm	<b>Resolution</b>	Corresponding to 5.5 $\mu$ m
<b>Maximum Relative Aperture</b>	1:2.0	<b>Flange Back</b>	17.526 mm
<b>Iris</b>	F2.0 - Close (No F drop)	<b>Operation</b>	<b>Focus</b> Motorized ( DC $\pm$ 6.4V, Max. 45 mA )
<b>Zoom Ratio</b>	2.7 X		<b>Zoom</b> Motorized ( DC $\pm$ 6.4V, Max. 45 mA )
<b>Angular Field of View</b>	30.5° x 22.9° at 24 mm 11.2° x 8.4° at 65 mm		<b>Iris</b> Motorized ( DC $\pm$ 6.4V, Max. 45 mA )
<b>Image Format</b>	12.8 x 9.6mm ( $\phi$ 16 mm)	<b>Operation Temperature</b>	- 10 °C ~ 50 °C / 14 °F ~ 122 °F
<b>Minimum Object Distance</b>	7 m (From Front Vertex)	<b>Mount</b>	C-Mount (Adjustable Lens Position)
<b>Object Dimensions at M.O.D.</b>	3822 x 2837 mm at 24 mm 1370 x 1030 mm at 65 mm	<b>Front Thread</b>	62mm P0.75
<b>Optical Back Focal Distance</b>	23.29mm (In Air)	<b>Size, Weight</b>	$\phi$ 65 x 80.5(W) x 80(H) x 112.5(D) mm

### DIMENSIONS

UNIT: mm

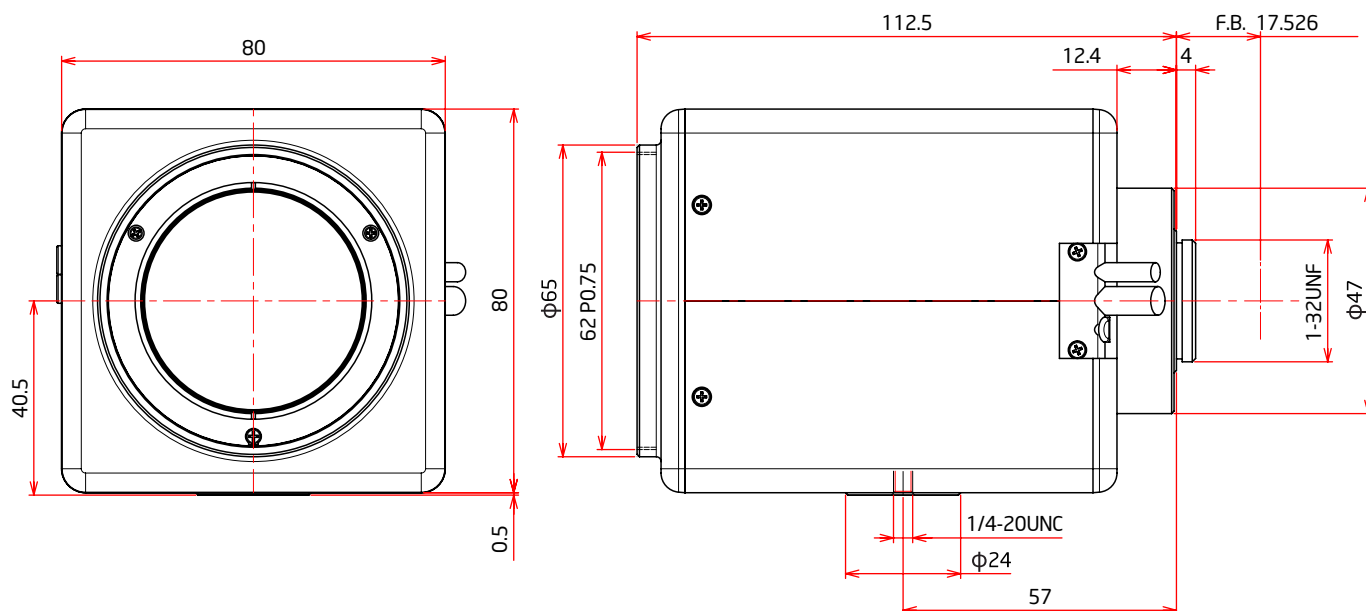

### CIRCUIT DIAGRAM

